



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 022 881 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
20.04.2005 Bulletin 2005/16

(51) Int Cl.⁷: **H04L 12/56**

(21) Application number: 00100286.4

(22) Date of filing: **20.01.2000**

(54) Ultra-low bandwidth intra-network routing method

Leitweglenkungsverfahren in einem Intranetzwerk mit sehr niedriger Bandbreite

Procédé de routage dans un intranet de bande passante très faible

(84) Designated Contracting States:
DE FR GB

(30) Priority: 22.01.1999 US 235544

(43) Date of publication of application:
26.07.2000 Bulletin 2000/30

(73) Proprietor: **Northrop Grumman Corporation**

(72) Inventors:

- Walker, W. Clinton
Artesia, CA 90701 (US)
- Bixler, David C.
Hermosa Beach, CA 90254 (US)
- Siegel, Neil G.
Rancho Palos Verdes, CA 90274 (US)

(74) Representative: Schmidt, Steffen J., Dipl.-Ing.
Wuesthoff & Wuesthoff,
Patent- und Rechtsanwälte,
Schweigerstrasse 2
81541 München (DE)

(56) References cited:
WO-A-97/28628 **US-A- 5 787 080**
US-A- 5 790 551

- MITROU N M ET AL: "VOICE AND DATA INTEGRATION IN THE AIR-INTERFACE OF A MICROCELLULAR MOBILE COMMUNICATION SYSTEM" IEEE TRANSACTIONS ON VEHICULAR TECHNOLOGY, IEEE INC. NEW YORK, US, vol. 42, no. 1, 1 February 1993 (1993-02-01), pages 1-13, XP000363394 ISSN: 0018-9545

Description

[0001] This invention was made with Government support under contract number DAAB07-95-D-E604 awarded by the Department of the Army. The Government has certain rights in this invention.

BACKGROUND OF THE INVENTION

[0002] This invention relates generally to networks of interconnected computers and, more particularly, to techniques for routing messages or data packets from one node to another in a "locally" located intranet. The nature of the invention first requires a few definitions by way of background. Relatively small networks, perhaps of up to a few hundred nodes and typically located in a single building or group of buildings, are referred to as local area networks (LANs). When the nodes are further apart, the terms "wide area network" or "metropolitan area network" are sometimes used, but the distinction is one of degree and the definitions sometimes overlap. LANs are typically interconnected through switching nodes called bridges and routers, to form a large "internet" of interconnected computer nodes.

[0003] The internet with which most computer users are familiar is referred to as the Internet. Interconnection of nodes on the Internet, and the transmission of data between them, is governed by a set of protocols defined by the Internet community and called the Internet protocol (IP) suite, or sometimes the TCP/IP suite. (TCP is "transmission control protocol.")

[0004] The term "intranet" is used to refer to a localized portion of the Internet that is confined to a specific enterprise, such as a corporation or a governmental, educational or military organization. An intranet typically includes multiple interconnected LANs and may extend over a large geographical area. Use of the term intranet implies a commonality of interest among the users of the nodes in the intranet, and usually a commonality of ownership and control as well.

[0005] Multiple intranets are interconnected in the Internet by high-bandwidth "backbone" communication links, such as leased lines. Individual LANs in the Internet may also have relatively high bandwidth, which is a measure of their data carrying capacity. There are some situations, however, in which the bandwidth of an intranet is severely strained by the traffic of data packets and administrative messages being transmitted. This is especially true for intranets including increasingly popular wireless and mobile communications nodes. In wireless networks, the bandwidth is inherently limited in comparison to networks that use coaxial cables or optical fibers as a transmission medium.

[0006] In the Internet, messages and data are addressed to users by user name, i.e., a name that the user of a network node has selected or has been assigned, and a domain name, which is usually a name, nickname or abbreviation selected by an organization

with which the user is affiliated in some way, as an employee or subscriber, for example. One of the main problems that must be solved in inter-networks is to determine the path that data packets should traverse to reach end destinations. This problem is usually addressed by devices known as routers, or by routing software in host platforms. Routers make decisions regarding packet forwarding based on numeric addresses, rather than symbolic names. The host computer that originates the packet (the "source" computer) has the responsibility of determining the numeric address ("IP address") of the destination, generally by using services provided by special network nodes referred to as "name servers".

5 After determining the IP address of the destination, the source will send the message, in one or more data packets, to the local router for further processing.

[0007] There are a number of options that can be employed by such routers in order to make proper forwarding decisions, but they fall into two main categories: the routers can be pre-programmed with "static" routing information, or they can run a dynamic routing protocol. In the latter case, the routers constantly exchange administrative data packets throughout the network; these administrative data packets contain the information re-

20 quired for the routers to find paths to the destinations of interest. The first approach ("static routing"), has the advantage of not requiring continual usage of network bandwidth for the exchange of such administrative information, but has two main disadvantages: First, it complicates the network planning process, since all possible routing paths must be anticipated and included in the routing tables of each router in the network; Second, it does not allow adaptations to failed communication links, or to hosts that join the network at arbitrary locations after the planning process has been completed.

25 This second shortcoming may be less important in an environment where hosts do not move and the communication media are extremely reliable, but is not suitable for a wireless network with mobile communication nodes.

[0008] The second approach ("dynamic routing") overcomes the disadvantages of the static approach, but at the cost of the communications load burden on the communications network of the continuous ex-

45 change of administrative data packets containing routing information between each of the routers. In most applications of the Internet, the additional bandwidth overhead imposed by these messages does not degrade network performance significantly. Even in intranets in which bandwidth has become limited for one reason or another, the overhead is tolerated because it serves a necessary function, and because connection to the Internet requires adherence to TCP/IP standards.

[0009] An intranet with an inherently low bandwidth, however, such as an intranet that includes wireless LANs, is more significantly affected by the overhead of these administrative messages used for path finding and routing purposes. Therefore, there is a need for a

method of message routing within an intranet that can operate without the bandwidth overhead usually associated with the Internet, but which still allows connection to the Internet in conformance with TCP/IP standards. The present invention satisfies this need.

[0010] "Voice and data integration in the air-interface of microcellular mobile communication system", N. M. Mitrou et al., IEEE Transaction on Vehicular Technology, 42 (1993) February, No. 1 New York, US, pages 1-13, discloses a method for establishing a communications path between two user terminals (telephones). This method employs a mobile communication environment relying on wireless transmission. Actual communications between the terminals are carried-out via logic channels between the terminals. Communications between terminals can be accomplished via full-duplex voice connections realized through circuit switching wherein one channel per direction is allocated exclusively to a connection for its entire duration.

[0011] WO 97/28638 is directed to real-time telephone communications between parties via the Internet. In order to use conventional telephones, which cannot be directly connected to the Internet, between each telephone and the Internet an additional communications server is arranged. An Internet based communications path between telephones is established between the communications servers. Termination of a communications path between telephones is carried out in response to a hang-up signal from one the telephones.

SUMMARY OF THE INVENTION

[0012] The present invention resides in a method according to claim 1 for establishing a communication path between two nodes of an intranet without using the conventional path finding and routing techniques associated with networks. Briefly, and in general terms, the method of the invention comprises the steps of: using an auxiliary communication channel to establish switched virtual circuit between a first router associated with a first host and a second router associated with a second host, wherein the first router defines a static route from the first host to the second host via the switched virtual circuit based on a first data packet transmitted from the first host and addressed to the second host; establishing, by the second router, a second static route from the second host to the first host via the switched virtual circuit based on source address information extracted from the first data packet by the second router; transmitting data packets in both directions over the switched virtual circuit via the first and second static routes; and deactivating the switched virtual circuit when packet transmission activity has ceased for a selected time interval. Before establishing the switched virtual circuit, the method "finds" the second router associated with the second or "destination" host computer.

[0013] As not known from the above discussed Article "Voice and Data Integration ...", the method according

to claim 1 defines host and routers associated with each other, to establish the switched virtual circuit between the routers and to deactivate the switched virtual circuit when packet transmission activity has ceased for a selected time.

[0014] Further preferred embodiments of the invention are defined in the dependent claims.

[0015] It will be appreciated from the foregoing summary that the present invention represents a significant improvement in the field of network communication. In particular, the invention provides a technique for establishing a communication path in a very-low bandwidth intranet, such as a wireless intranet, without sacrificing bandwidth capacity for use by continual administrative messages. Other aspects and advantages of the invention will become apparent from the following more detailed description, taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016]

FIG 1 is a block diagram of a wireless intranet employing the principles of the present invention; FIG. 2 is flowchart depicting the sequence of operations performed in accordance with the invention in establishing a communication path between nodes A and B of FIG. 1; FIG. 3 is flowchart depicting the sequence of operations performed in accordance with the invention in establishing a communication path between nodes E and F of FIG. 1; and FIG. 4 is a diagram depicting time slot types in a time-division multiple-access communication channel.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0017] As shown in the drawings for purposes of illustration, the present invention pertains to a method for establishing a communication path between two nodes of a computer intranet without the costly bandwidth overhead usually associated with path finding and routing functions in a network.

[0018] FIG. 1 is an illustrative intranet employing the present invention and having three wireless networks, indicated by reference numerals 10, 12 and 14, respectively. Wireless network 10 differs from the other two wireless networks in that it has a coordination channel associated with it. A coordination channel is a separate radio communication channel through which all the nodes connected to the network may communicate independently of a main communication channel through which data packets are transmitted. The coordination channel may be used in a wireless network to avoid or reduce collisions between transmissions from different nodes. Networks conventionally employ collision sens-

ing and repeated transmissions to avoid conflicts between messages from different sources, but if collisions can be prevented by use of the coordination channel, the useful bandwidth can be increased. The coordination channel itself uses very little bandwidth and may, for example, be accommodated in a different frequency band from the main communication channel, or may utilize a separate time slot if time division multiplexing is used. A specific implementation of the coordination channel is further described below with reference to FIG. 4.

[0019] The wireless networks 10, 12 and 14 each have a plurality of switch nodes or routers 16 connected to them. Each router 16 may be connected to one or more of the networks 10, 12 and 14 and to other networks not shown in the figure. Each router 16 may also have a plurality of endnodes or hosts 18 connected to it. Any of these hosts 18 should be able to communicate with any other of the hosts. The difficulty, as described earlier in this specification, is that the router 16 associated with a source host 18 must have address information pertaining to the router associated with a destination host. Maintaining this address information using a conventional Internet approach requires the continual transmission of administrative messages, and this imposes a sometimes unacceptable bandwidth overhead for wireless intranets.

[0020] In accordance with the invention, communication between hosts 18 in an intranet is effected by establishing a pathway between the hosts at the time that transmission of a message or messages is desired. Moreover, establishment of the message pathway or route is achieved by use of the coordination channel of at least one network in the intranet. The following example should clarify this concept.

[0021] Suppose the user of host A, indicated by reference numeral 18A, wishes to establish communication with the user of host B 18B. Both host A and host B are connectable, through respective routers 16A and 16B, to wireless network 10, which includes a coordination channel. The steps by which a communication path is established between host A and host B are specified in the flowchart of FIG. 2. First, as shown in block 30, host A sends a message destined for host B to its (host A's) local router 16A. At this stage, router 16A already knows, or can obtain, host B's IP (Internet protocol) address. Some additional terms need to be defined by way of further background before continuing this description.

[0022] Computer network architecture is usually designed and described in terms of different functional layers, in accordance with the OSI (Open Systems Interconnection) Reference Model defined by the ISO (International Standards Organization). The basic principle of layering is that each layer is responsible for providing some service to the layer above and does so by using the services of the layer below. Each layer communicates with its peer layer in other nodes of the network, through use of a protocol for that layer, and this commu-

nication is accomplished by direct communication with the layer immediately below. For purposes of this discussion, the lowest three layers of the OSI model are relevant.

5 **[0023]** The lowest layer is the physical layer, the specifics of which are dependent on the nature of the transmission medium used by the network. The physical layer protocol deals with such issues as conversion of bits of information into electrical signals and bit-level synchronization in a data transmission. The next layer above the physical layer is called the data link layer, and its function is to transmit blocks of information across a communication link. Another important function is addressing of individual hosts in a LAN, using a datalink layer address.

[0024] The next layer up is called the network layer, and its function is to allow any pair of nodes in the network to communicate with each other. The network layer protocol deals with such issues as finding a path through a series of interconnected nodes, data packet fragmentation and re-assembly, when needed, and congestion control. Other layers above the network layer in the OSI model include the transport layer, the session layer, the presentation layer and the application layer, but these are not material to the present discussion. A data packet generated in the application layer for transmission onto the network is processed through successively lower layers until it reaches the physical layer and the transmission medium. The session layer adds a session header to the packet, the transport layer adds a transport header, the network layer adds a network header, and the data link layer adds a data link header. When the same data packet passes up through the layers in a receiving node, these headers are processed by the respective layers and stripped off the data packet.

[0025] The network header includes such information as a destination address. Intermediate nodes designated as routers perform their function at the network layer level, specifically by using information in the network header of each data packet. The router determines, from the destination network layer address in the network header, which direction to transmit the packet. Before retransmission, the network header may be updated to reflect that the packet has been processed through this particular route "hop."

[0026] By way of further background, transmission of data between two end nodes in a large network may be effected by either of two general techniques. One is referred to as "connectionless" data exchange, or "datagram," in which each data packet is routed through the network independently of other packets. The network does its best to deliver all the packets pertaining to a single message in their original sequence, but there is some probability that this may not happen. The other approach is connection-oriented service, in which a more permanent virtual connection is established between two nodes in a network and, once the connection is established, two-way communication may proceed

without concern for independent packets being lost or transposed, because the packets are all transmitted along the same route in sequence. The present invention avoids the difficulties of the prior art by establishing a virtual circuit between two network nodes, as will now be described in further detail.

[0027] As already noted above with respect to block 30, the first step in establishing the virtual circuit is for host 18A to transmit a packet addressed to host 18B to host A's local router 16A. Next, as indicated in block 32, router 16A broadcasts an address resolution protocol (ARP) query over the coordination channel of the wireless network 10. A further digression is needed at this point to explain the need for this step.

[0028] Router 16A is assumed to know already the IP address (network layer address) of the destination host 18B. Unfortunately, a destination address in the form of a 32-bit network layer address is sufficient to reach a destination end node or host system if the host is attached to the network directly with a dedicated point-to-point link between the host and a router. In the more general case, the destination host may be attached to a LAN, which is in turn attached to the network through one or more routers. In this instance, delivery of a message to its final destination host requires knowledge of the host's data link layer address, which is not always known to routers.

[0029] The ARP query allows an originating router to learn the data link layer address corresponding to a destination host for which a network layer address is known. In the example shown in FIG. 1, all of the hosts 18 and routers 16 connected to the wireless network 10 receive the ARP query over the coordination channel. Router 16B, which has knowledge of host 18B's address, transmits an ARP response message over the coordination channel, as indicated in block 34. The ARP response message includes the requested datalink layer address for destination host 18B. In accordance with a standard established for some types of LANs, the data link layer is subdivided into two sublayers, one of which is the medium access control (MAC) layer. Therefore, the address provided in an ARP response is sometimes referred to as the MAC sublayer address.

[0030] Next, router 16A, with knowledge of the complete destination address for host 18B, establishes an emulated switched virtual circuit (SVC) between host 18A and host 18B, as indicated in block 36. SVC is the terminology used in the connection-oriented network layer protocol of the ISO, and is sometimes referred to as "X.25" service, a protocol originally developed by the CCITT (Comité Consultatif Internationale de Télégraphique et Téléphonique). Router 16A defines a static route to host 18B via the new switched virtual circuit, by transmitting a special message sequence to a network control station 38 of the wireless network 10. The emulated SVC is indicated by the line 40 between the routers 16A and 16B.

[0031] A first data packet is then transmitted over the

new circuit, as indicated in block 42. The transmitted packet passes from host 18A to router 16A, and from there via the virtual circuit to router 16B, which routes the packet to host 18B. When this first data packet is

5 processed by router 16B, source address information is extracted from the packet header and used to establish a static route back to host 18A by the new virtual circuit.

[0032] Other data packets may then be transmitted in either direction between the hosts 18A and 18B, as indicated in block 44. Finally, as indicated in block 46, after the circuit has been inactive for a selected time period, routers 16A and 16B deactivate the switched virtual circuit.

[0033] It will be observed from FIG. 1 that not all of the 15 hosts 18 are connected directly to the wireless network 10 with the coordination channel. For example, a different problem is presented in establishing communications between host 18E, which is connected to wireless network 12 through router 16E, and host 18F, which is connected to wireless network 14 through router 16F. The steps followed to establish this connection are shown in FIG. 3.

[0034] First, as indicated in block 50, host 18E transmits a data packet addressed to host F to its local router 16E. Router 16E forwards the packet to a gateway router 16C that provides a connection to the network 10 with the coordination channel, as indicated in block 52, using a previously determined datalink layer address for router 16C.

[0035] Then gateway router 16C broadcasts an ARP 20 query message over the coordination channel, as indicated in block 54, requesting the datalink layer, or MAC sublayer, address for host 18F. Gateway router 16D sends a proxy ARP response on behalf of host 18F, as indicated in block 56, providing the MAC sublayer address corresponding to the interface between router 16D and wireless network 10. Gateway router 16D responds to the ARP query because the router has the IP address for host 18F in a "client list" maintained in this router.

[0036] As indicated in block 58, a switched virtual circuit is established between routers 16C and 16D, as indicated by line 59, in the same manner as described in the previous example using hosts 18A and 18B as the 25 source and destination. As indicated in block 60, data packets are transmitted in both directions through the established circuit. Packets for host 18F arriving at router 16D are forwarded through network 14 in a conventional manner. Similarly, packets for host 18E are forwarded through network 12 in a conventional manner. Finally, as indicated in block 62, routers 16C and 16D deactivate the circuit after a period of inactivity has been sensed.

[0037] The coordination channel of the wireless network 10 is implemented in a presently preferred embodiment by employing a time-division multiple-access (TDMA) technique. Basically, the time available for broadcast over a wireless communication channel is divided

into time slots that are allocated to carry specific types of information on TDMA sub-channels. As indicated in FIG. 4, one set of time slots, referred to as type A slots, is reserved exclusively to carry coordination channel messages, such as the ARP requests described in block 32 (FIG. 2) and block 54 (FIG. 3). Regular message traffic between hosts 18 is transmitted during time slots of type B, for which the nodes may have to contend in accordance with conventional CSMA (collision sense multiple-access) rules. A third time slot type (C) is used to perform an automatic relaying function. Hosts 18 on the coordination network automatically re-broadcast coordination network messages in one of the relay time slots. The proportion of time slots allocated to each type may be selected or adjusted in accordance with the network configuration or traffic conditions. In one implementation of an intranet having approximately 1,000 wireless nodes, path finding in accordance with the invention is effective close to 100% of the time of operation, but uses only about 1% of the network capacity.

[0038] In the currently implemented embodiment, the nodes are divided into two layers. Only about one-third of the nodes participate directly in the path-finding / physical-address-determination process, using automatically relayed broadcasts over the coordination channel. The remaining nodes are serviced using a "proxy" concept. Each of the directly participating nodes maintains a list of some of the nodes that participate only by proxy, and which can be reached in only one "hop" from the directly participating node. When a request to establish connection service is received by a participating node acting as a proxy, the receiving node responds as if the request was intended for the directly participating node. On receipt of data messages, the proxy node forwards them to the intended destination. Protocol mechanisms ensure that the proxy lists are maintained automatically and that no more than one proxy node responds to an original service request on the coordination network. An alternative to this two-layer configuration is a single-layer configuration in which every node in the intranet listens to directly for service requests broadcast on the coordination network.

[0039] As noted above, the present invention is implemented in an intranet that has relatively low bandwidth capacity. Such an intranet may, however, still interface with components of a larger internet, such as the Internet. The interface will normally be effected through routers that have connections to both the intranet and the internet. These routers must execute standard exterior gateway protocols in order to connect the intranet properly with the larger-scale internet.

[0040] It will be appreciated from the foregoing that the present invention represents a significant improvement in techniques for establishing a communication path in a large interconnected network having limited bandwidth capacity. In particular, the invention provides for establishment of a virtual circuit between any two hosts in the network, using a coordination channel to set

up the virtual circuit without the need for the transmission of large numbers of administrative messages, which can occupy a large proportion of the available bandwidth. It will also be appreciated that, although an illustrative embodiment of the invention has been described in detail, various modifications may be made. For example, the coordination channel may be implemented using multiplexing schemes other than TDMA, such as wavelength division multiplexing.

10

Claims

1. A method for establishing a communications path between two host computers in a low-band width intranet (10), comprising the steps of:

- using an auxiliary communication channel to establish a switched virtual circuit (40; 59) between a first router (16A; 16C) associated with a first host (18A; 18E) and a second router (16B; 16D) associated with a second host (18B; 18F), wherein the first router (16A; 16C) defines a first static route from the first host (18A; 18E) to the second host (18B; 18F) via the switched virtual circuit (40; 59) based on a first data packet transmitted from the first host (18A; 18E) and addressed to the second host (18B; 18F);
- establishing, by the second router (16B; 16D), a second static route from the second host (18B; 18F) to the first host (18A; 18E) via the switched virtual circuit (40; 59) based on source address information extracted from the first data packet by the second router (16B; 16D); and
- transmitting data packets in both directions over the switched virtual circuit (40; 59) via the first and second static routes; and
- deactivating the switched virtual circuit (40; 59) when packet transmission activity has ceased for a selected time interval.

2. The method as defined in claim 1, comprising the steps of:

- transmitting from the first host (18A; 18E) the first data packet addressed to the second host (18B; 18F);
- receiving the first data packet at the first router (16A; 16C) connected to an intranet (10);
- broadcasting from the first router (16A; 16C), over an auxiliary communication channel, a request message identifying the second host (18B; 18F);
- receiving the request message at the second router (16B; 16D), which recognizes the second host (18B; 18F) identified in the request message, the second router (16B; 16D) connected to the intranet (10);

- transmitting over the auxiliary communication channel a response to the request message from the second router (16B; 16D) to the first router (16A; 16C), the response providing a complete address for the second host (18B; 18F);
 - establishing in the first router (16A; 16C), upon receiving the response to the request message, the switched virtual circuit (40; 59) between the first and second routers (16A, 16B; 16C, 16D);
 - transmitting the first data packet from the first router (16A; 16C) to the second router (16B; 16D) over the switched virtual circuit (40; 59); and
 - transmitting the first data packet from the second router (16B; 16D) to the second host (18B; 18F) to complete delivery of the first data packet.
3. The method as defined in claim 1 or 2, comprising the steps of:
- retrieving the address of the first host (18A; 18E) from the first data packet upon its arrival at the second router (16B; 16D); and
 - using the address of the first host (18A, 18E) in the second router (16B; 16D) to establish a return path for data packets to be transmitted from the second host (18B; 18F) to the first host (18A; 18E).
4. The method as defined in claim 3, comprising the step of:
- transmitting second and additional data packets from the second host (18B; 18F) to the first host (18A; 18E) over the switched virtual circuit (40; 59).
5. The method as defined in claim 4, comprising the step of:
- transmitting additional data packets from the first host (18A; 18E) to the second host (18B; 18F) over the switched virtual circuit (40; 59).
6. The method as defined in claim 5, comprising the steps of:
- sensing in one of the first and second routers (16A, 16B; 16C, 16D) that data packet transmission over the switched virtual circuit (40; 59) has ceased for the selected time interval; and
 - deactivating the switched virtual circuit (40; 59) between the first and second hosts (18A, 18B; 18E, 18F) when the sensing step determines that the selected time interval has elapsed.
7. The method as defined in one of the claims 1 to 6, comprising the step of:
- transmitting from the first host (18A) the first data packet to a router (16A) associated with the first host (18A), this router being the first router (16A).
8. The method as defined in one of the claims 1 to 6, comprising the step of:
- transmitting from the first host (18E) the first data packet to the first router (16C) through a first network (12).
9. The method as defined in one of the claims 1 to 6 and 8, comprising the steps of:
- transmitting from the first host (18E) the first data packet to a third router (16E) being associated with the first host (18E); and
 - transmitting from the third router (16E) the first data packet to the first router (16C).
10. The method as defined in one of the claims 1 to 9, comprising the step of:
- transmitting the first data packet to the second host (18B) from a router (16B) associated with the second host (18B), this router being the second router (16B).
11. The method as defined in one of the claims 1 to 9, comprising the step of:
- transmitting the first data packet from the second router (16D) to the second host (18F) through a second network (14).
12. The method as defined in one of the claims 1 to 9 and 11, comprising the steps of:
- transmitting the first data packet from the second router (16D) to a fourth router (16F) being associated with the second host (18F); and
 - transmitting the first data packet from the fourth router (16F) to the second host (18F) to complete delivery of the first data packet.


Patentansprüche

1. Verfahren zur Aufbauen eines Kommunikationswegs zwischen zwei Host-Computern in einem Intranet (10) geringer Bandbreite, die Schritte umfassend:
 - Verwenden eines Hilfskommunikationskanals,

- um einen geschalteten virtuellen Kreis (40; 59) zwischen einem einem ersten Host (18A; 18E) zugeordneten, ersten Router (16A; 16C) und einem einem zweiten Host (18B; 18F) zugeordneten, zweiten Router (16B; 16D) aufzubauen, wobei der erste Router (16A; 16C) eine erste statische Route von dem ersten Host (18A; 18E) zu dem zweiten Host (18D; 18F) über den geschalteten virtuellen Kreis (40; 59) basierend auf einem von dem ersten Host (18A; 18E) übertragenen und an den zweiten Host (18B; 18F) adressierten, ersten Datenpaket definiert, 5
- Aufbauen einer zweiten statischen Route durch den zweiten Router (16B; 16D) von dem zweiten Host (18B; 18F) zu dem ersten Host (18A; 18E) über den geschalteten virtuellen Kreis (40; 59) basierend auf von dem zweiten Router (16B; 16D) aus dem ersten Datenpaket extrahierten Quellenadressinformationen, und 10
 - Übertragen von Datenpaketen in beide Richtungen über den geschalteten virtuellen Kreis (40; 59) über die ersten und zweiten statischen Routen, und 15
 - Deaktivieren des geschalteten virtuellen Kreises (40; 59), wenn die Paketübertragungsaktivität für ein ausgewähltes Zeitintervall aufgehört hat.
2. Verfahren nach Anspruch 1, mit den Schritten:
- Übertragen von dem ersten Host (18A; 18E) des an den zweiten Host (18D; 18F) adressierten, ersten Datenpakets, 20
 - Empfangen des ersten Datenpaketes bei dem mit einem Intranet (10) verbunden, ersten Router (16A; 16C),
 - Übertragen einer den zweiten Host (18B; 18F) identifizierende Anfragenachricht per Broadcast von dem ersten Router (16A; 16C) über einen Hilfskommunikationskanal, 25
 - Empfangen der Anfragenachricht bei dem zweiten Router (16B; 16D), der den in der Anfragenachricht identifizierten, zweiten Host (18B; 18F) erkennt, wobei der zweite Router (16B; 16D) mit dem Intranet (10) verbunden ist,
 - Übertragen einer Antwort auf die Anfragenachricht von dem zweiten Router (16B; 16D) zu dem ersten Router (16A; 16C) über den Hilfskommunikationskanal, wobei die Antwort eine vollständige Adresse für den zweiten Host (18B; 18F) bereitstellt, 30
 - Aufbauen des geschalteten virtuellen Kreises (40; 59) zwischen den ersten und zweiten Routern (16A; 16B; 16C; 16D) in dem ersten Router (16A; 16C) beim Empfang der Antwort auf die Anfragenachricht, 35
 - Übertragen des ersten Datenpaketes von dem ersten Router (16A; 16C) zu dem zweiten Rou-
- ter (16B; 16D) über den geschalteten virtuellen Kreis (40; 59), und 40
- Übertragen des ersten Datenpaketes von dem zweiten Router (16B; 16D) zu dem zweiten Host (18B; 18F), um die Zustellung des ersten Datenpaketes abzuschließen.
3. Verfahren nach Anspruch 1 oder 2, mit den Schritten:
- Wiedererlangen der Adresse des ersten Hosts (18A; 18B) aus dem ersten Datenpaket bei dessen Ankunft an dem zweiten Router (16B; 16D), und 45
 - Verwenden der Adresse des ersten Hosts (18A; 18E) in dem zweiten Router (16B; 16D), um einen Rückweg für von dem zweiten Host (18B; 18F) zu dem ersten Host (18A; 18E) zu übertragende Datenpakte aufzubauen.
4. Verfahren nach Anspruch 3, mit dem Schritt:
- Übertragen von zweiten und zusätzlichen Datenpaketen von dem zweiten Host (18B; 18F) zu dem ersten Host (18A; 18E) über den geschalteten virtuellen Kreis (40; 59).
5. Verfahren nach Anspruch 4, mit dem Schritt:
- Übertragen von zusätzlichen Datenpaketen von dem ersten Host (18A; 18E) zu dem zweiten Host (18B; 18F) über den geschalteten virtuellen Kreis (40; 59).
6. Verfahren nach Anspruch 5, mit den Schritten:
- Erfassen in einem der ersten und zweiten Router (16A; 16B; 16C; 16D), das die Datenpaketübertragung über den geschalteten virtuellen Kreis (40; 59) für das ausgewählte Zeitintervall aufgehört hat, und 50
 - Deaktivieren des geschalteten virtuellen Kreises (40; 59) zwischen den ersten und zweiten Host (18A; 18B; 18E; 18F), wenn der Erfassungsschritt feststellt, dass das ausgewählte Zeitintervall abgelaufen ist.
7. Verfahren nach einem der Ansprüche 1 bis 6, mit dem Schritt:
- Übertragen des ersten Datenpaketes von dem ersten Host (18A) zu einem Router (16A), der dem ersten Host (18A) zugeordnet ist, wobei dieser Router der erste Router (16A) ist.
8. Verfahren nach einem der Ansprüche 1 bis 6, mit dem Schritt:

- Übertragen des ersten Datenpakets von dem ersten Host (18E) zu dem ersten Router (16C) über ein erstes Netzwerk (12).
9. Verfahren nach einem der Ansprüche 1 bis 6 und 8, mit den Schritten:
- Übertragen des ersten Datenpakets von dem ersten Host (18E) zu einem dritten Router (16E), der dem ersten Host (18E) zugeordnet ist, und
 - Übertragen des ersten Datenpakets von dem dritten Router (16E) zu dem ersten Router (16C).
10. Verfahren nach einem der Ansprüche 1 bis 9, mit dem Schritt:
- Übertragen des ersten Datenpakets zu dem zweiten Host (18B) von einem Router (16B), der dem zweiten Host (18B) zugeordnet ist, wobei dieser Router der zweite Router (16B) ist.
11. Verfahren nach einem der Ansprüche 1 bis 9, mit dem Schritt:
- Übertragen des ersten Datenpakets von dem zweiten Router (16D) zu dem zweiten Host (18F) durch ein zweites Netzwerk (14).
12. Verfahren nach einem der Ansprüche 1 bis 9 und 11, mit den Schritten:
- Übertragen des ersten Datenpaks von dem zweiten Router (16D) zu einem vierten Router (16F), der dem zweiten Host (18F) zugeordnet ist, und
 - Übertragen des ersten Datenpakets von dem vierten Router (16F) zu dem zweiten Host (18F), um die Zustellung des ersten Datenpaks abzuschließen.
- Revendications**
1. Un procédé pour établir un canal de transmission entre deux ordinateurs hôtes dans un intranet à faible bande passante (10), comportant les étapes de:
 - utilisation d'un canal de transmission auxiliaire pour établir un circuit virtuel commuté (40; 59) entre un premier routeur (16A; 16C) associé à un premier hôte (18A; 18E) et un deuxième routeur (16B; 16D) associé à un deuxième hôte (18B; 18F), dans lequel le premier routeur (16A; 16C) définit une première route statique entre le premier hôte (18B; 18E) et le deuxième hôte (18B; 18F) par l'intermédiaire du circuit vir-
- tuel commuté (40; 59) basé sur un premier paquet de données transmis à partir du premier hôte (18A; 18E) et adressé au deuxième hôte (18B; 18F);
- établissement, par le deuxième routeur (16B; 16D), d'une deuxième route statique du deuxième hôte (18B; 18F) au premier hôte (18A; 18E) par l'intermédiaire du circuit virtuel commuté (40; 59) basé sur l'information d'adresse source extraite du premier paquet de données par le deuxième routeur (16B; 16D); et
 - transmission de paquets de données dans les deux directions par le circuit virtuel commuté (40; 59) par l'intermédiaire des première et deuxième routes statiques; et
 - désactivation du circuit virtuel commuté (40; 59) quand l'activité de transmission de paquet a cessée pour un intervalle de temps choisi.
2. Le procédé comme défini dans la revendication 1, comportant les étapes de:
 - transmission à partir du premier hôte (18A; 18E) du premier paquet de données adressé au deuxième hôte (18B; 18F);
 - réception du premier paquet de données au premier routeur (16A; 16C) connecté à un intranet (10);
 - émission à partir du premier routeur (16A; 16C), par un canal de transmission auxiliaire, d'un message de demande identifiant le deuxième hôte (18B; 18F);
 - réception du message de demande au deuxième routeur (16B; 16D), qui reconnaît le deuxième hôte (18B; 18F) identifié dans le message de demande, le deuxième routeur (16B; 16D) connecté à l'intranet (10);
 - transmission par le canal de transmission auxiliaire d'une réponse au message de demande du deuxième routeur (16B; 16D) au premier routeur (16A; 16C), la réponse fournissant une adresse complète pour le deuxième hôte (18B; 18F);
 - établissement dans le premier routeur (16A; 16C), lors de la réception de la réponse au message de demande, du circuit virtuel commuté (40; 59) entre les premiers et deuxièmes routeurs (16A, 16B; 16C, 16D);
 - transmission du premier paquet de données à partir du premier routeur (16A; 16C) jusqu'au deuxième routeur (16B; 16D) par le circuit virtuel commuté (40; 59); et
 - transmission du premier paquet de données à partir du deuxième routeur (16B; 16D) jusqu'au deuxième hôte (18B; 18F) pour compléter la livraison du premier paquet de données.
 3. Le procédé comme défini dans la revendication 1

- ou 2, comportant les étapes de:
- recherche de l'adresse du premier hôte (18A; 18E) à partir du premier paquet de données lors de son arrivée au deuxième routeur (16B; 16D); et
 - utilisation de l'adresse du premier hôte (18A; 18E) dans le deuxième routeur (16B; 16D) pour établir un chemin de retour pour que les paquets de données soient transmis du deuxième hôte (18B; 18F) au premier hôte (18A; 18E). 5
4. Le procédé comme défini dans la revendication 3, comportant l'étape de:
- transmission du deuxième paquet de données et des paquets de données additionnels à partir du deuxième hôte (18B; 18F) jusqu'au premier hôte (18A; 18E) par le circuit virtuel commuté (40; 59). 15
5. Le procédé comme défini dans la revendication 4, comportant l'étape de:
- transmission des paquets de données additionnels entre le deuxième hôte (18A; 18E) et le premier hôte (18B; 18F) par le circuit virtuel commuté (40; 59). 25
6. Le procédé comme défini dans la revendication 5, comportant les étapes de:
- détection dans un des premiers et deuxièmes routeurs (16A, 16B; 16C, 16D) que la transmission de paquet de données par le circuit virtuel commuté (40; 59) a cessée pour l'intervalle de temps choisi; et
 - désactivation du circuit virtuel commuté (40; 59) entre les premiers et deuxièmes hôtes (18A, 18B; 18E, 18F) quand l'étape de détection détermine que l'intervalle de temps choisi s'est écoulé. 30
7. Le procédé comme défini dans une des revendications 1 à 6, comportant l'étape de: 45
- transmission à partir du premier hôte (18A) du premier paquet de données jusqu'à un routeur (16A) associé au premier hôte (18A), ce routeur étant le premier routeur (16A). 50
8. Le procédé comme défini dans une des revendications 1 à 6, comportant l'étape de:
- transmission à partir du premier hôte (18E) du premier paquet de données jusqu'au premier routeur (16C) à travers un premier réseau (12). 55
9. Le procédé comme défini dans une des revendications 1 à 6 et 8, comportant les étapes de:
- transmission à partir du premier hôte (18E) du premier paquet de données jusqu'à un troisième routeur (16E) étant associé au premier hôte (18E); et
 - transmission à partir du troisième routeur (16E) du premier paquet de données jusqu'au premier routeur (16C). 10
10. Le procédé comme défini dans une des revendications 1 à 9, comportant l'étape de:
- transmission du premier paquet de données au deuxième hôte (18B) à partir d'un routeur (16B) associé au deuxième hôte (18B), ce routeur étant le deuxième routeur (16B). 15
11. Le procédé comme défini dans une des revendications 1 à 9, comportant l'étape de:
- transmission du premier paquet de données depuis le deuxième routeur (16D) jusqu'au deuxième hôte (18F) à travers un deuxième réseau (14). 20
12. Le procédé comme défini dans une des revendications 1 à 9 et 11, comportant les étapes de:
- transmission du premier paquet de données à partir du deuxième routeur (16D) jusqu'à un quatrième routeur (16F) étant associé à un deuxième hôte (18F); et
 - transmission du premier paquet de données à partir du quatrième routeur (16F) jusqu'au deuxième hôte (18F) pour compléter la livraison du premier paquet de données. 35

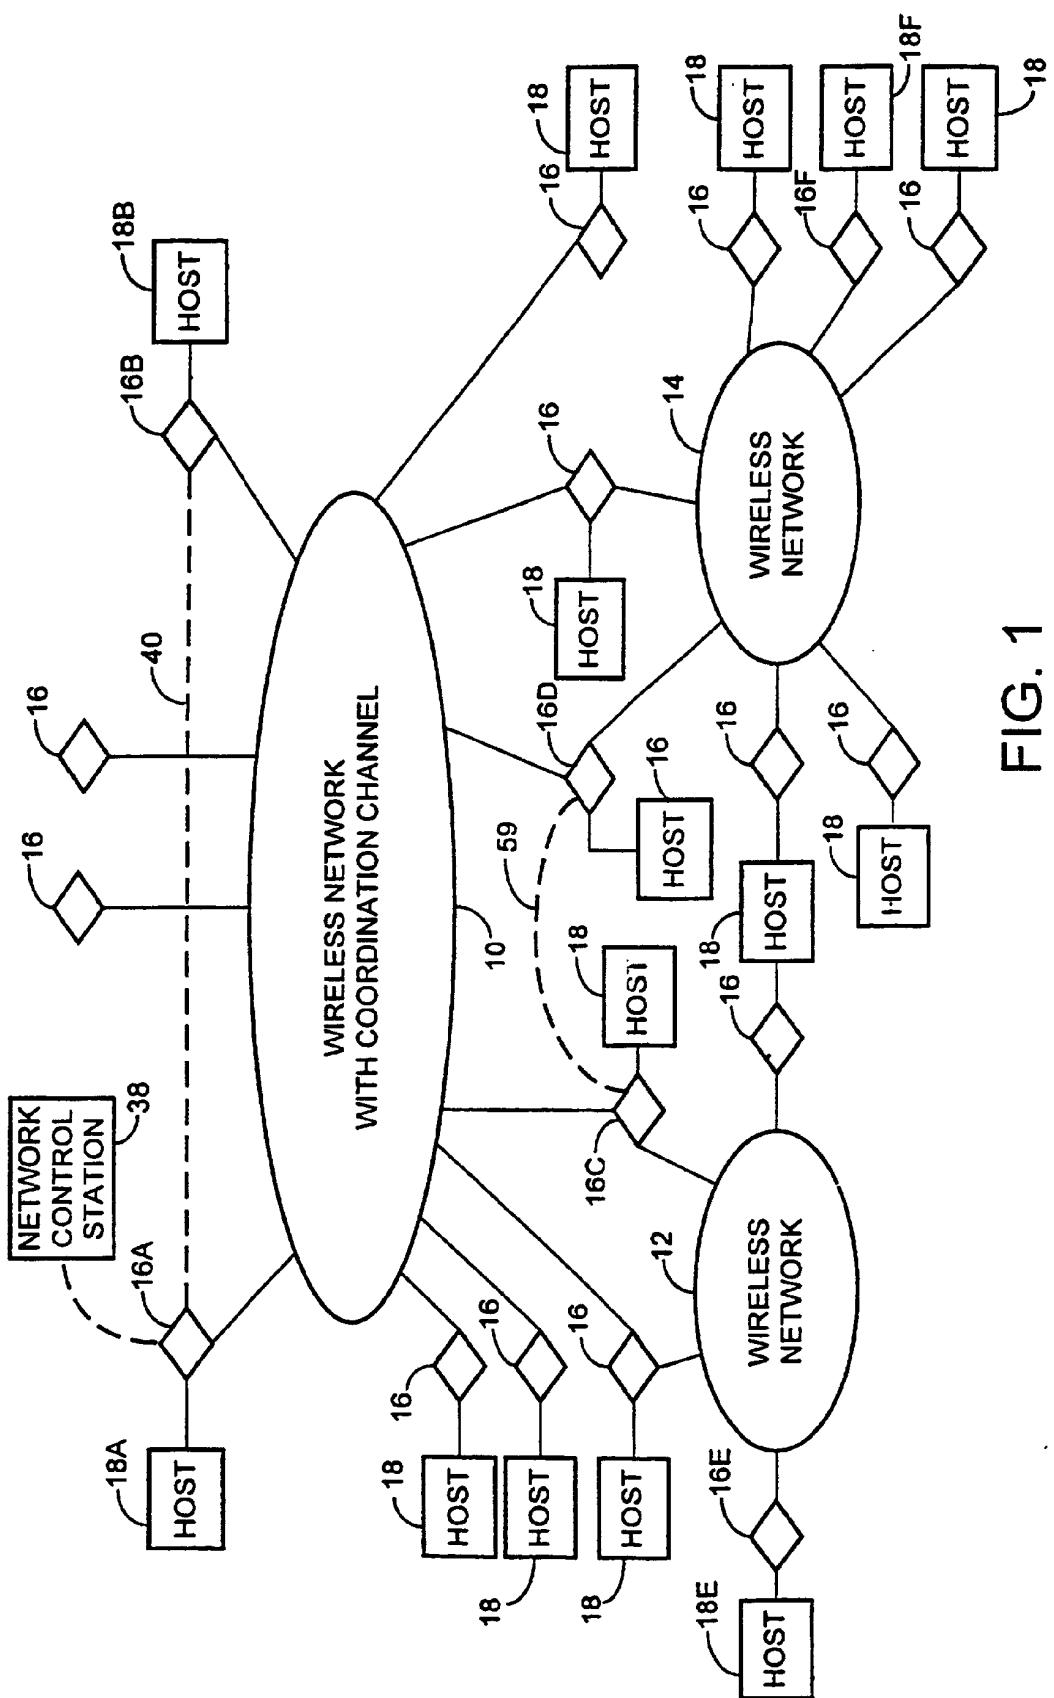

1
FIG.

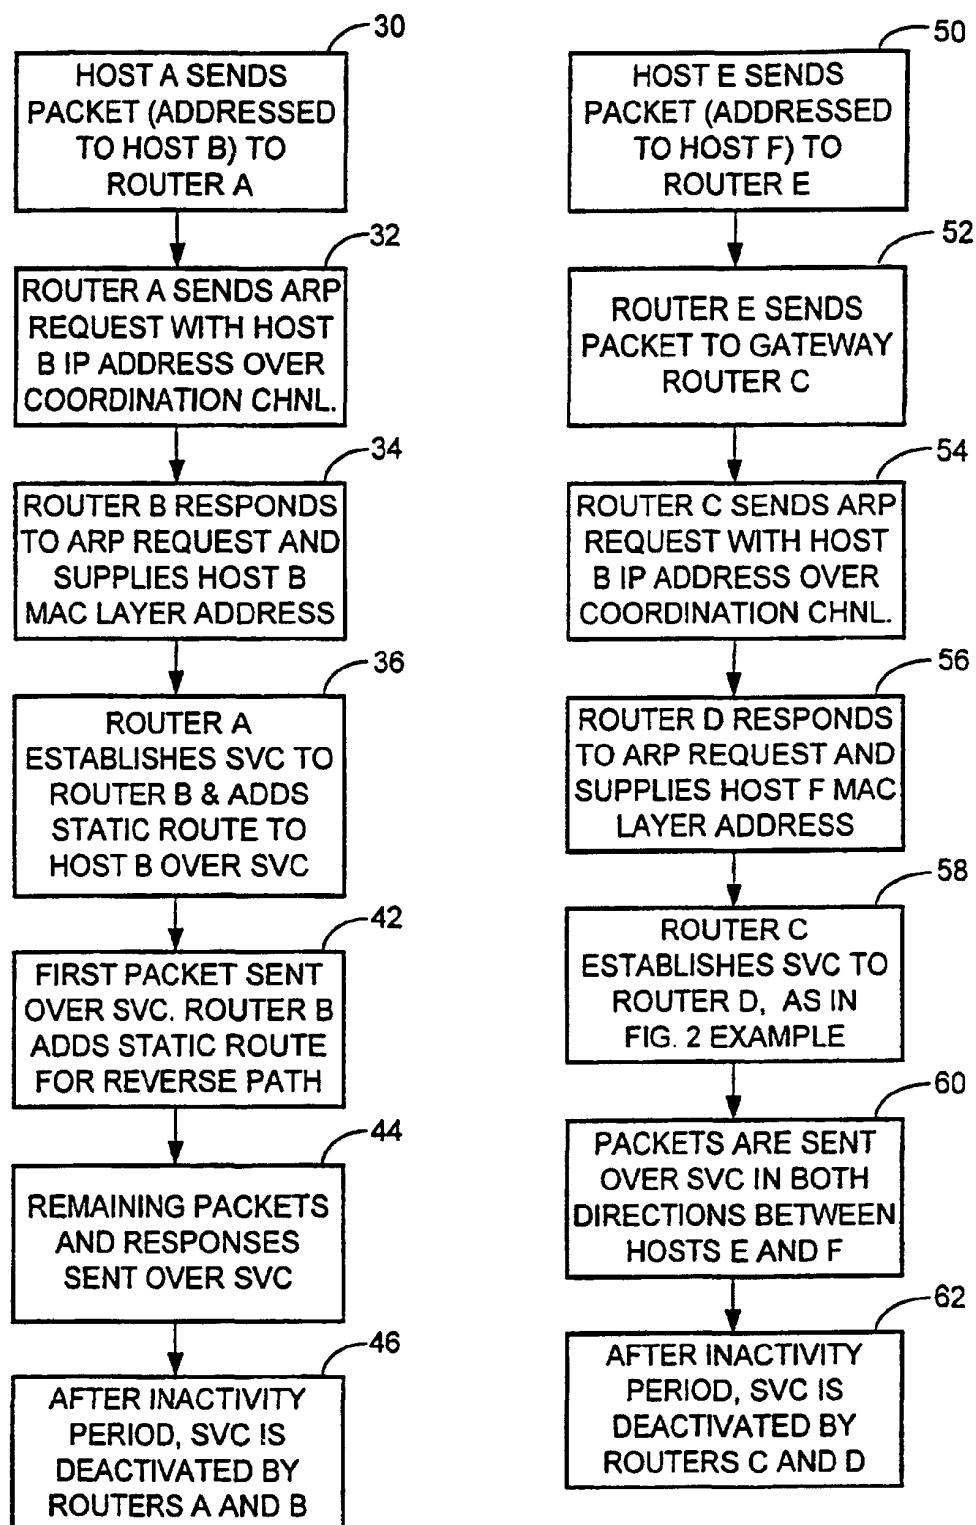


FIG. 2

FIG. 3

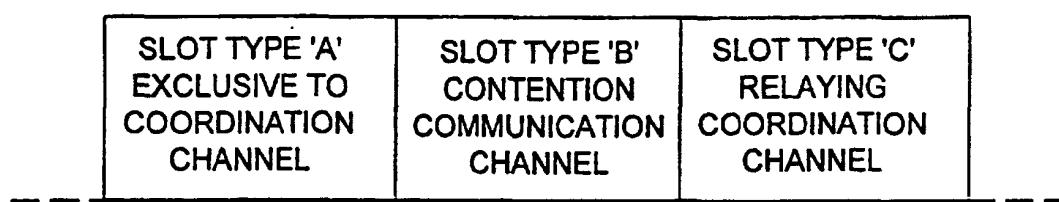


FIG. 4